


# DCNM-LPAPP-PE Participant application perpetual

## DICENTIS

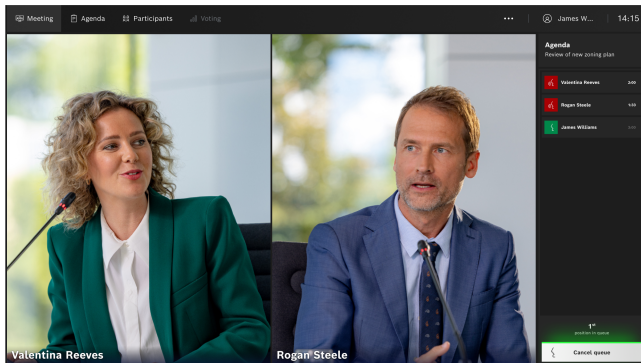

The DICENTIS Participant Application expands the capability of the DICENTIS Conference System while providing maximum flexibility to its users. It is a native app that can run on standard off-the-shelf Android devices with a screen size of your choice. The app improves the meeting experience for the participants by offering additional control, meeting data, and multimedia content. It enables the participants to request to speak, cast votes, and access meeting information, such as the agenda topics and document links, from a standard tablet that is connected to a discussion device in the meeting room. The app provides the participants with a second alternative to use critical features, such as request to speak and cast votes. The control of these features can be done through both the discussion devices and the app. For IT professionals, it offers ease of management, with periodic device replacements and Android security updates.

### Functions

- For security purposes, the technician registers the Android devices in the system once prior to use
- The Participant Application can be used both in fixed-seating and free-seating systems
- With the Participant Application, the participants can:
  - Easily log in with their user name and password, PIN-code or via their DICENTIS discussion device
  - Select their preferred user interface language upon the login
  - Watch the live video of the active speaker(s)

- ▶ Enriched meeting experience with additional control, meeting data, and multimedia content
- ▶ Runs on standard off-the-shelf Android devices with any screen size
- ▶ Easy linking to the DICENTIS devices for an enhanced user experience
- ▶ Request to speak and cast votes available via the DICENTIS devices as well as the app
- ▶ Easy IT management with simple device replacements and security updates

- Issue a request to speak
- See the active speaker and the speaker list
- Cast votes
- See the voting results
- See the list of present and absent participants
- View agenda topics
- Open documents and files linked to the agenda topics
- See an incoming presentation stream

### Parts included

Quantity	Component
1	E-mail with license activation information.

### Technical specifications

The DCNM-LPAPP-PE is an add-on license for DICENTIS systems with a perpetual license plan. The systems running with perpetual licenses (premium and ultimate) already include one free DCNM-LPAPP-PE license. This license enables one participant to use the Participant Application. To increase the number of participants that can use the app, additional DCNM-LPAPP-PE licenses are required. The number of DCNM-LPAPP-PE licenses determines the number of participants that can use the app. Up to 300 Participant Applications are supported.

The DCNM-LPAPP-PE license cannot be added to DICENTIS systems with professional license plans (prepaid or subscription). In these systems, the Participant App is included as a standard feature to add extra value.

Type of participant licenses activated in the system	Participant App usage
Perpetual (DCNM-LPP-PE and DCNM-LPU-PE)	1 DCNM-LPAPP-PE license is included in the system. Increasing the number of participants that can use the app requires additional DCNM-LPAPP-PE licenses.
Prepaid (DCNM-LPPP-P1Y and DCNM-LPUP-P1Y)	The app is included in the participant licenses.
Subscription (DCNM-LPPP-S1Y and DCNM-LPUP-S1Y)	The app is included in the participant licenses.

### Tablets

The following recommended requirements apply to the tablets running the Participant Application:

Specification	Recommended
Operating system	Android 11 or higher
Screen resolution (pixels)	1920 x 1080 px or higher
CPU <sup>1</sup>	Snapdragon Gen 6 or better (Passmark > 8000, CPU Score > 4000)
Video decoder <sup>2</sup>	Hardware H264 and H265 (HEVEC) video decoding
Video encoder	Hardware video encoding H264/H265
Memory	Min. 4 GB
Connectivity <sup>3</sup>	Min. 1 Gb/s wired Ethernet connection

1 - Refer to <https://www.androidbenchmark.net/> to check the CPU Mark score of the chipset.

2 - Video decoder performance may vary due to differences in Android devices. It is recommended to test the Android device with a DICENTIS Conference System to verify the video performance.

3 - If the device does not have an integrated Ethernet port, it is required to use an external Ethernet to USB-C adapter with minimum 1 Gb/s speed to connect to the DICENTIS network. It is recommended to use an adapter that supports pass-through charging.

### Ordering information

#### DCNM-LPAPP-PE Participant application perpetual

Add-on license for systems with the Perpetual license plan. Increases the number of participants that can use the Participant Application.

Order number **DCNM-LPAPP-PE | F.01U.428.415**



<https://www.boschsecurity.com>